

Relays-Coupler MT

3PDT, coil DC or AC 50-60 Hz

Features

- Plug-in relay
- Switching current
 AC 250 V max. 10 A
 DC 32 V max. 10 A
 DC 60 V max. 1 A
- Minimal load 24 V 10 mA
- Power-on current 20 A
- Contact material AgNi 90/10
- Safety protection acc. to VDE 0110
- Class III acc. to VDE 0110
- Test voltage 2.5 kV
- Test button finger safe, lockable
- DIN rail mounting TS35
- International certifications



Mounting height 85 mm




Stock

Article	Coil	Ordering code
Relay 12 V DC	110 Ω	MT 321012
Relay 24 V DC	475 Ω	MT 321024
Relay 60 V DC	2850 Ω	MT 321060
Relay 220 V DC	40000 Ω	MT 321220
Relay 24 V AC	86 Ω	MT 326024
Relay 42 V AC	266 Ω	MT 326042
Relay 48 V AC	544 Ω	MT 326048
Relay 115 V AC	2000 Ω	MT 326115
Relay 230 V AC	8300 Ω	MT 326230
Socket	Screw connection	MT 78750 (ES11X)
Retaining clip		MR 28800

* discount on gross price:

Piece	:	10	20	100	200	500
Discount [%]	:	5	10	15	20	25

Connection diagram

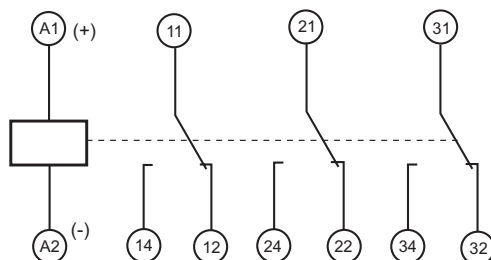

Dimension socket

