

Solid State Relay CKRD2430

with integrated heat-sink for DIN rail mounting


Features

- Max. load 24 ... 280V AC/ max. 30A*
- Max. I²t (1620A²sec)
- Voltage drop at max. load 1.6V
- Leak current without drive 10mA
- Full 2-port isolation
- Test voltage 4kV ~
- Drive circuit 4.5 ... 32V DC with LED green
- Input current 15mA/12VDC or 20mA/24VDC with internal short circuit proof
- Screw terminals for input and output max. AWG6 (10mm²)
- DIN rail mounting TS35
- International approvals UL, CSA, VDE, CE




Order code: **CKRD2430**

*Derating

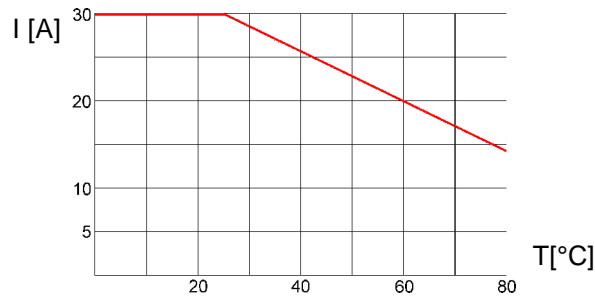

Dimensions

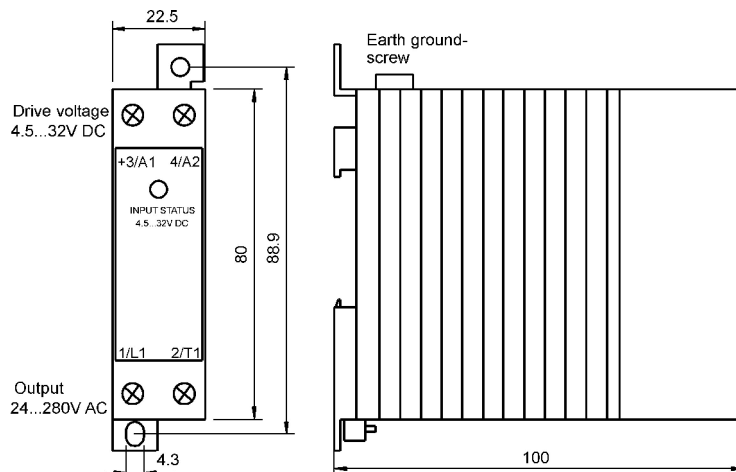

Note:
 Mounting space between multiple devices, minimum 20mm.