



Relay coupler RT 424

4PDT, coil 24V DC or 230V AC 50/60Hz

Features

- Plug-in relay
- Max. load 8A AC 250V AC
- Contact material Ag/Ni 9010
- Safety protection acc. VDE 0106
- Class II acc. VDE 0700
- Test voltage 5kV
- Socket with screw terminals for TS35 DIN rail mounting
- International certifications

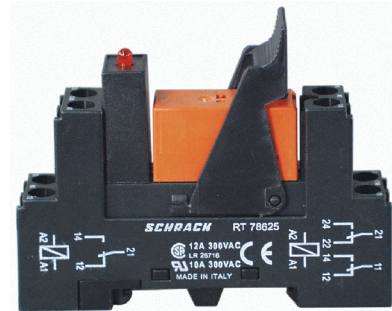

Stock


Article name		Order code
Relay	24VDC (coil 1440 Ω)	RT 424024
Relay	230VAC 50/60Hz (coil 32500 Ω)	RT 424730
Socket		RT 78625
Retaining clip		RT 16016
Labelling shield		RY 16040
LED-modul	red 24VDC	RPML 0024 (incl. inverse diode)
LED-modul	red 230VAC	RPML 0730

Package-Program (including 1 relay, socket, LED-modul, retaining clip and labelling shield)

Type	Order code
Package 24V DC	RT4P4L24
Package 230V AC	RT4P4T30

Connection diagram

Option: LED-modul

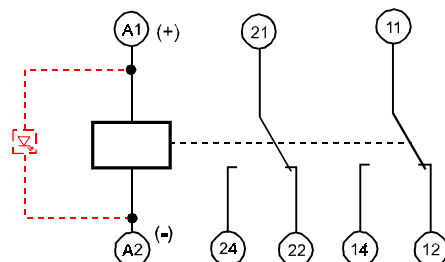

Dimensions

