


Panel Mounted Products Series TH25

2- and 3 position rotary- and keyswitch, Protection IP40

Picture with front bezel 18x24 and 1 contact element

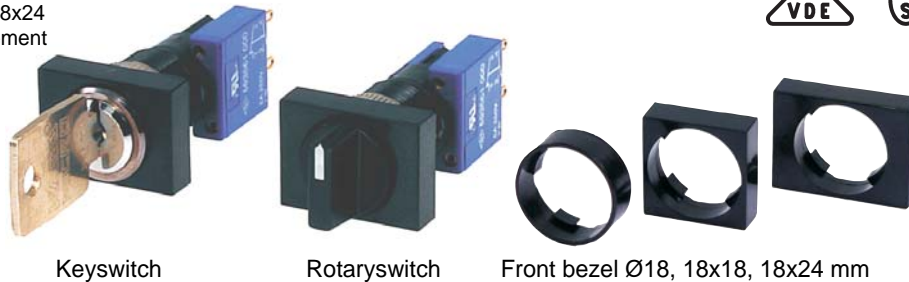

- Device without front bezel
- Panel cut-out 16.2 mm
- Without illumination
- Momentary or latching function (see picture below *Switching functions*)
- Contact blocks (see page 115) please order separately
- For position 1 and 2, 1 contact element each is necessary

Rotaryswitch type

	2 positions		3 positions	
Switching function	0-1 picture A	2-0-1 picture E	2-0-1 picture G	
	508 020	508 040	508 041	

Keyswitch type

	2 positions			
Switching function	0-1 picture B	0-1 picture C	0-1 picture A	0-1 picture D
Actuator key KABA-MICRO**	548 032	548 034	548 036	548038
Actuator key KABA-micro-E**	548 075		548 076	548 077

	3 positions			
Switching function	2-0-1 picture F	2-0-1 picture E	2-0-1 picture G	2-0-1 picture H
Actuator key KABA-MICRO**	548 050	548 053	548 054	548 057

Advantaged key code KABA MICRO EB002-EB020, more different key codes possible

Spare key KABA MICRO Standard EB001

Spare key KABA MICRO custom key code (please state in cleartext on order)


Spare key KABA micro-E Standard key code (no custom key code possible)

Delivery without specification

** Key per switch on order: KABA MICRO: 2 keys, KABA micro-E: 1 key

Front bezel	18x24 mm	18x18 mm	Ø18 mm
	493 060	493 062	493 064

Switching functions

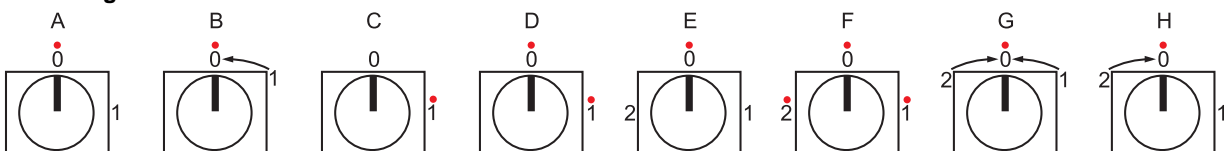


- Key trapping position for Keyswitch


Panel Mounted Products Series TH25

Dimensions


Switches and indicators

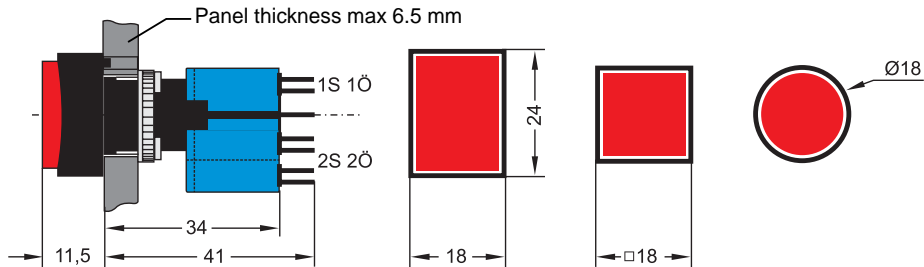


Rotary- and keyswitches

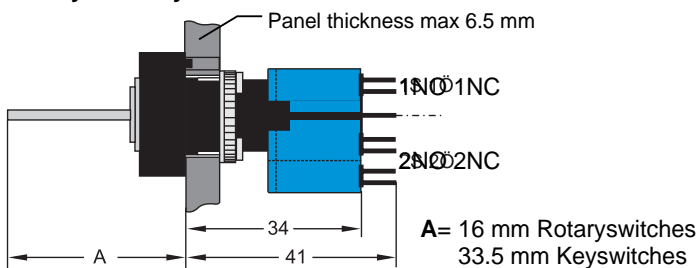

Electroacoustic transducer

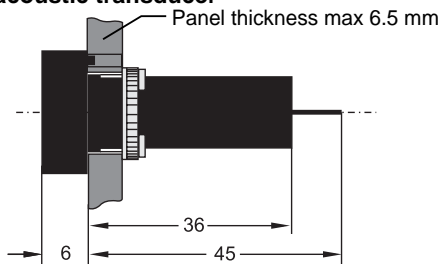

Panel cut-outs product series TH25

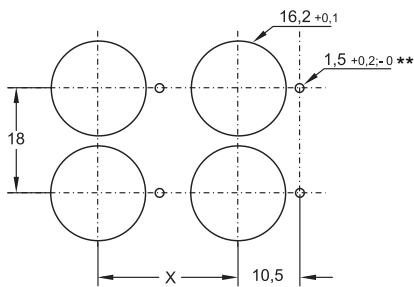


Panel cut-out min. distance X [mm]

18x24	1 contact block +1 double contact block	2 double contact blocks
	24	30
18x18	2 single contact blocks	1 single contact block
		1 double contact blocks
	18	2 double contact blocks ***
Ø18	as 18x18	as 18x18

***Hole for turning lock at bezel 18x24 mm

Emergency Stop switch

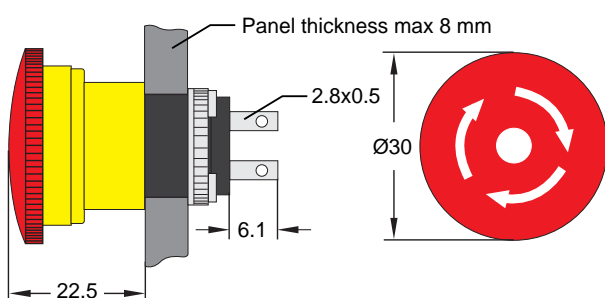

Mounting holes

